


jFEX

Uli

Intro: L1Calo Phase-1 System / Jets

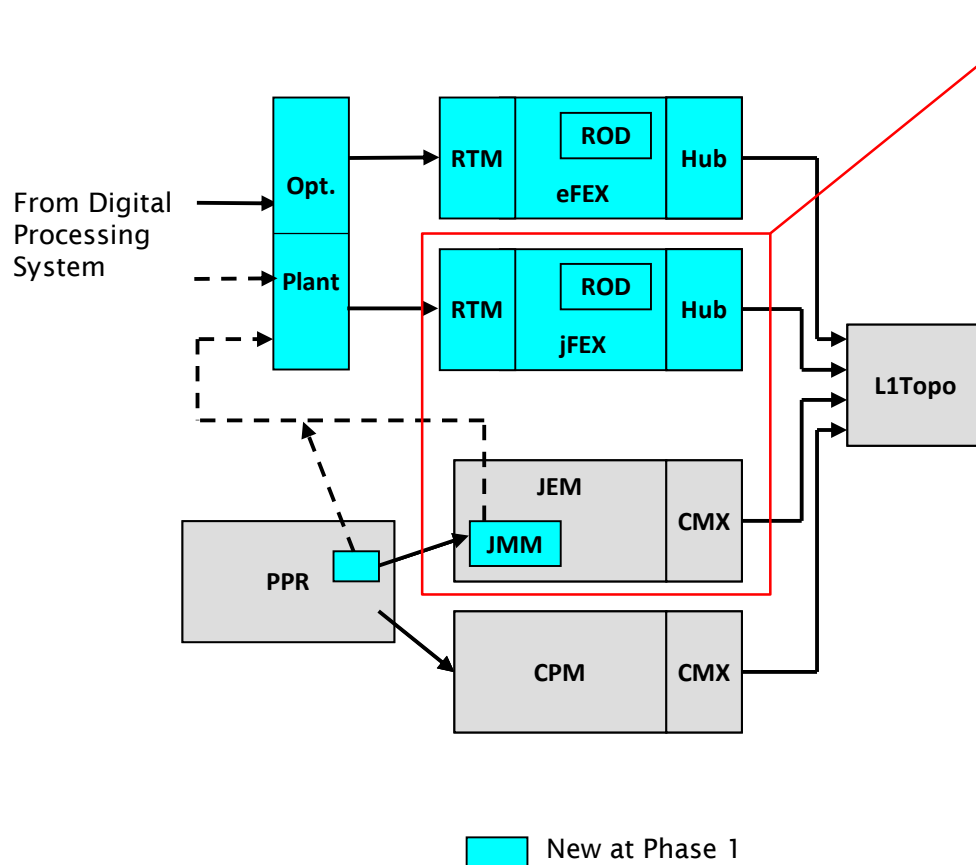

Jets

Phase-0

- Jet elements 0.2×0.2 ($\eta \times \phi$) (pre-processor)
- Sliding window processor for jet finding JEP / JEM
- Jet multiplicity determination
- Jet feature extraction into L1Topo (pre-phase1)




Phase-1: jet feature extractor jFEX


- Improve on jet finding (and MET measurement)
- Finer granularity

jFEX input data



- Fibre optical inputs only
- Fibre bundles via patch panel / fibre re-bundling stage
- Granularity $.1 \times .1$ ($\eta \times \varphi$)
- One electromagnetic, one hadronic tower per $\eta \times \varphi$ bin
- Unlike eFEX, no “BCMUX” scheme possible due to consecutive non-zero data
- Baseline 6.4 Gb/s line rate, 8b/10b encoding,
→ 128 bit per BC
- 16bit energy per tower, 8 towers per fibre
- LAr data from DPS
- Tile ... there are options...

Sliding Window Algorithms

Jet elements (towers) 
ROIs  environment 

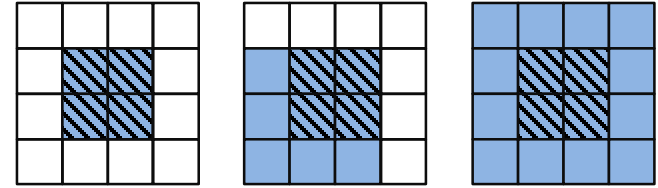


- Increase dynamic range
- Improve granularity by factor of four, to 0.1×0.1 ($\eta \times \phi$)
- Slightly increase environment (0.9×0.9 baseline)
- Allow for flexibility in jet definition (non-square jet shape, Gaussian filter, ...)
- Fat jets to be calculated from high granularity small jets
- Optionally increase jet environment

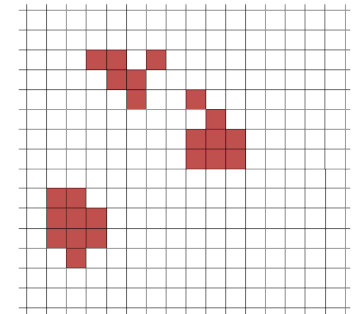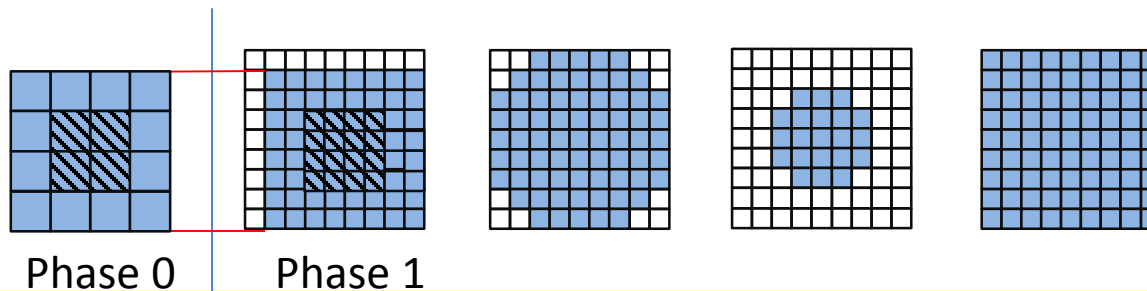

Data replication

Sliding window algorithm requiring large scale replication of data

- Forward duplication only (fan-out), no re-transmission
- Baseline: no replication of any source into more than two sinks
- **Fan-out in eta** handled at source only (DPS)
 - Transmit “core” and “environment” data
 - Duplication at the parallel end (on-FPGA), using additional Multi-Gigabit Transceivers
 - Allowing for differently composed streams
 - Minimizing latency
- **Fan-out in phi** handled at destination only
 - Baseline “far end PMA loopback”
 - Looking into details and alternatives
- N.B. phi strip vs. eta strip organisation tbd.

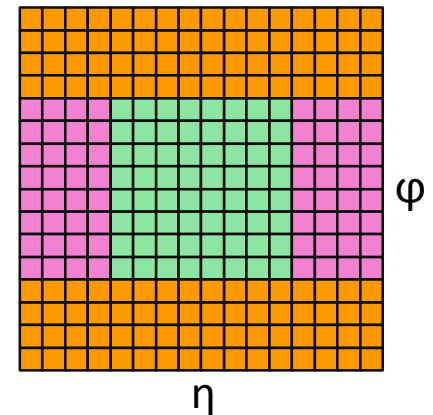

jFEX module partitioning




Algorithm requiring environment of 0.9×0.9 around each tower to be processed $\blacksquare \rightarrow \pm 4$ neighbours in eta and phi

Processor FPGAs

- **core of 0.8×0.8**
- Fully duplicated data in both eta and phi
- Total of 1.6×1.6 worth of data required
- 256 bins @ 0.1×0.1 granularity
- separate e/m + had channels \rightarrow 512 numbers (16-bit energies)
- That equals 64 on-chip receivers @6.4Gb/s (128 bit/lane/BC)
- Due to 100% on-board duplication, 32 of them are driven from a fibre


Processor modules

- Processing **phi ring**
- Receiving fully duplicated data in eta from DPS
- Module covering full phi (8×0.8), limited eta range of .8
- Carrying 8 FPGAs
- \rightarrow total of $8 \times 32 = 256$ fibres coming in
- 22×12 -way opto modules "**MicroPOD**" high density receivers
- Four 72-way fibre connectors ("MPO/MTP")

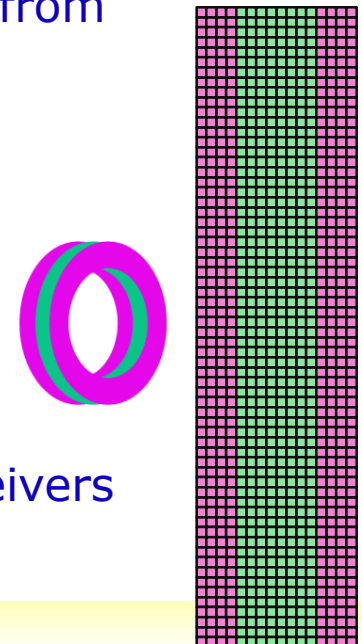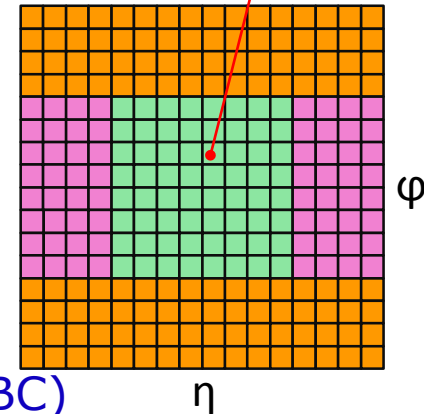


How to fit on a module ?

- AdvancedTCA format
- 8 processors (~XC7VX690T)
- 4 microPOD sockets each μ (including spare output)
- Opto connectors in Zone 3
- Fibre bundles from rear F
- fan-out via "far end PMA loopback" P
- consolidation of results on one of the processors Q (alternatively direct output)
- Output to front panel
- Small amount of module control logic / non-realtime (ROD)
- Maximise module payload with help of small-footprint ATCA power brick and tiny IPMC mini-DIMM

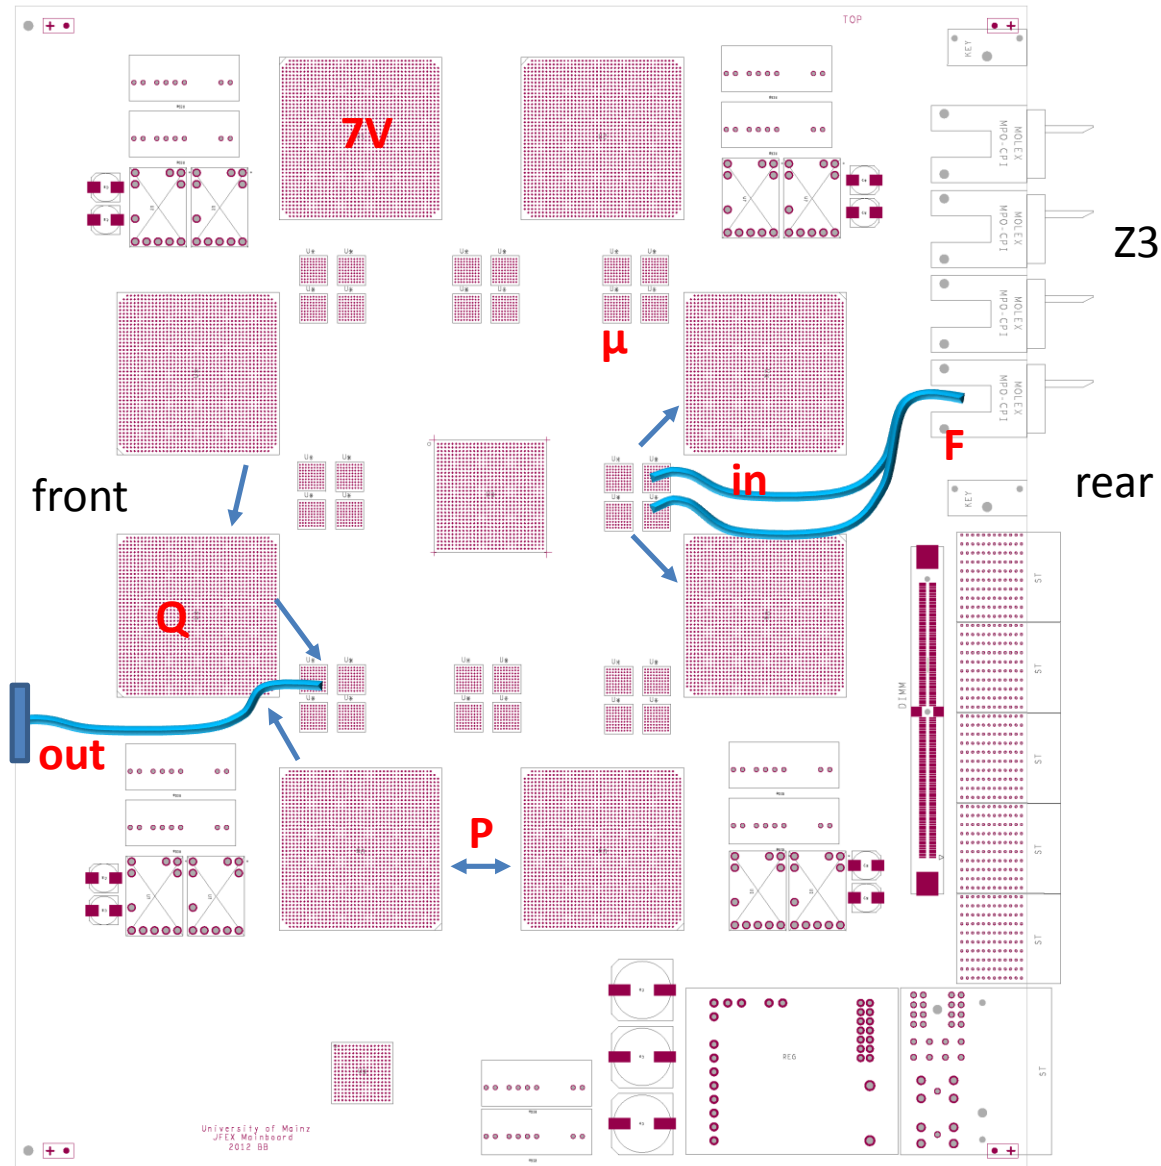

...and 3-d

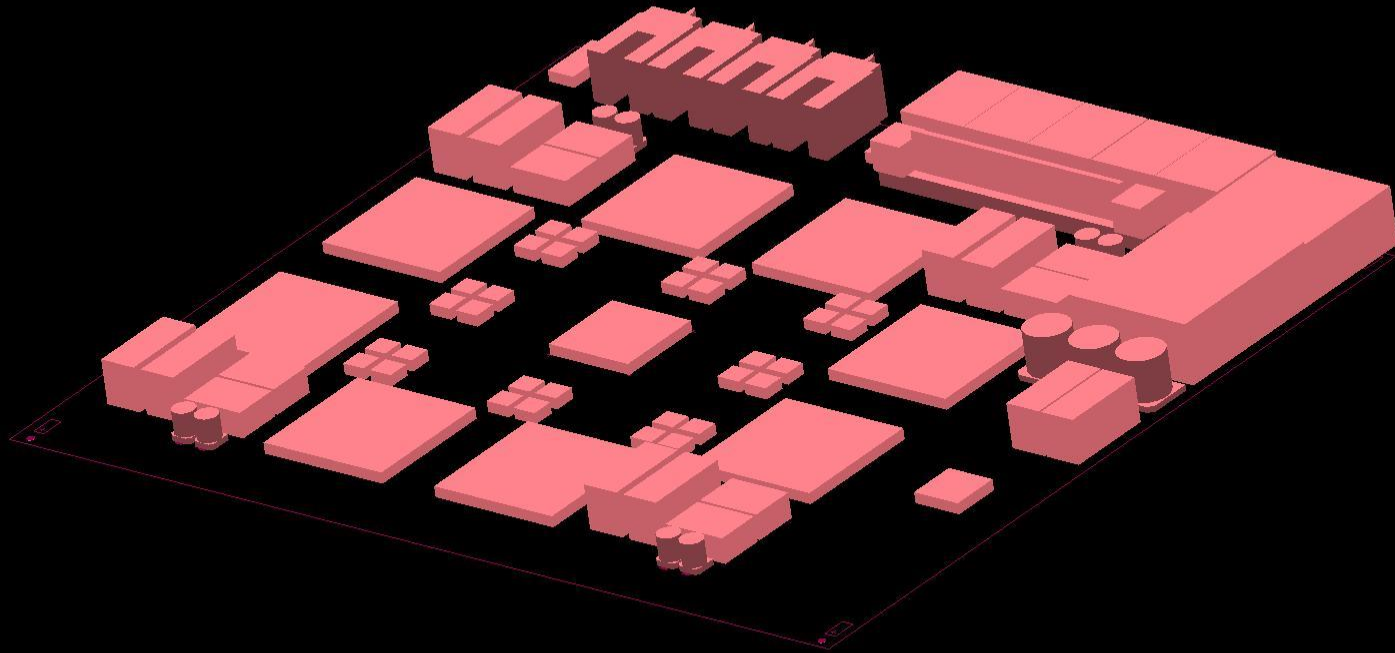


Alternative partitioning : eta strips

- At phase-2 strips along eta might better match tile modularity
- Larger environment is favoured physics-wise
- Explore different mapping of $(\eta \times \phi)$ -space to modules





- Cut detector in two halves along $\eta=0$
- Process 10-11 phi bins and half of all eta bins (~ 32) on one jFEX
- Allows for environment up to 1.1×1.1
- Density of 352 bins per module (vs. 512 for phi ring scheme)
- Requires additional duplication at $\eta=0$
 - Optical re-transmission might be possible due to (currently) lower latency for central barrel channels (cable paths)
 - Short fibre links between neighbouring modules, if modules of $\pm \eta$, same ϕ are interleaved in crate.
 - Discussions required

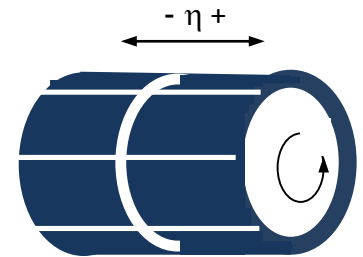

jFEX system

- Need to handle both fine granularity and large jet environment (minimum 0.9×0.9)
- Require high density / high bandwidth to keep input replication factor at acceptable level (3/4 of all FPGA inputs are duplicates)
- Fit in 8 modules / 12 modules
- Single ATCA shelf
- Sharing infrastructure with eFEX
 - Handling / splitting of fibre bundles
 - ROD design
 - Hub design
 - RTM

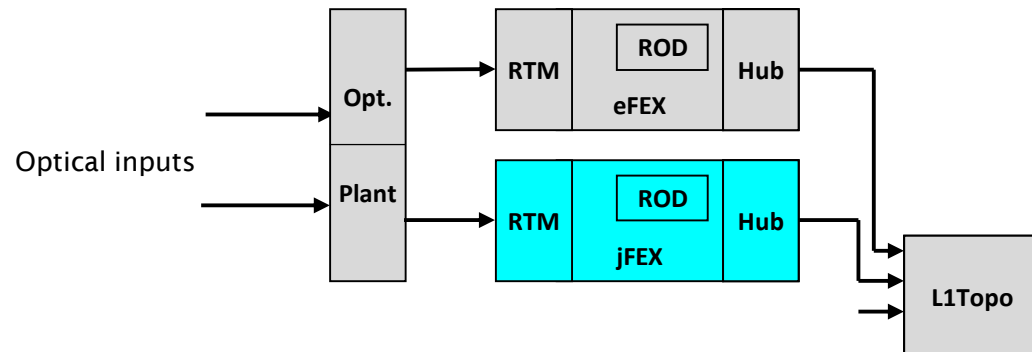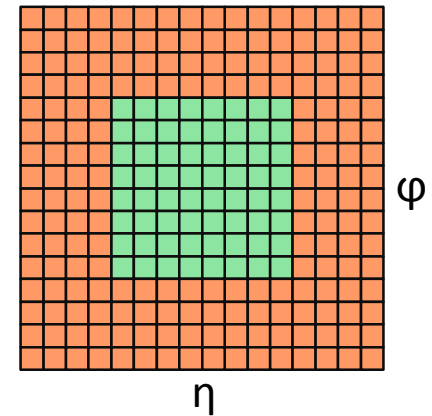


Firmware and (control / test) software

- high speed infrastructure (MGT)
- data conditioning (alignment/40Mbps/masks/pre-sums)
- thresholding scheme
- default jet algorithm (sliding window)
- advanced algorithms: jets, fat taus, ...
- energy sums
- board level merger / topology object formation and selection
- DAQ/ROI interface / embedded ROD (f/w, s/w)
- low level control (ATCA / IPMC to FPGA paths) f/w, s/w
- module (high level) control: register maps / IPBus and interfaces (f/w, s/w)
- Alignment control / monitoring / diagnostics / playback / spy incl. s/w
- TTC interface / embedded TTC
- in situ configuration update scheme (f/w, s/w)

*Firmware requiring large amount of corresponding software, PC based / embedded processor. Partitioning in firmware vs. software not currently defined. Significant effort required on module and system tests at CERN.

Schedule / Effort

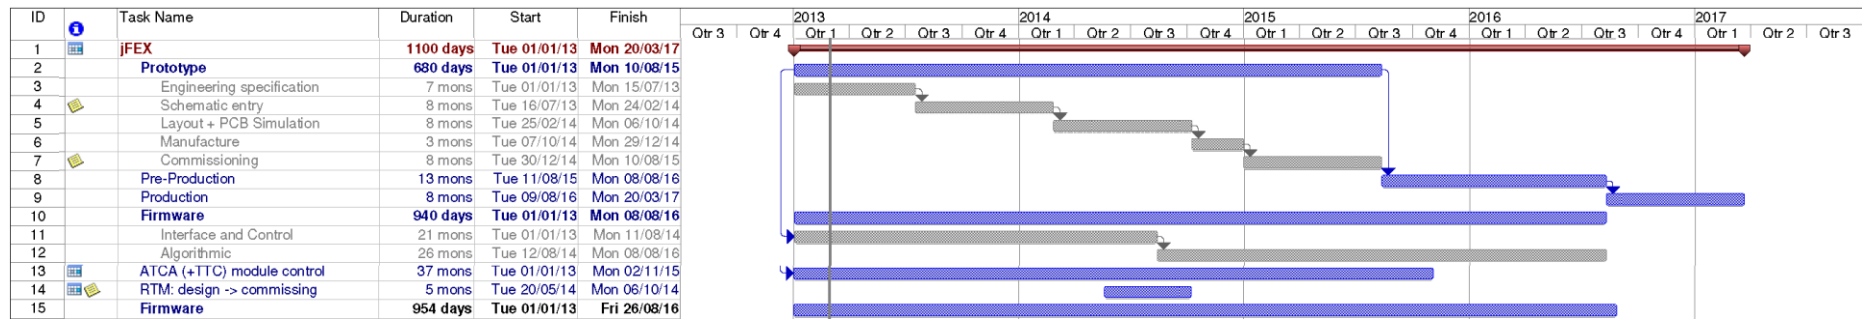

Plus installation/commissioning/system tests thereafter.

Milestones

PDR Q3/2013

FDR Q3/2015

PRR Q3/2016

Requirements

- jFEX hardware, firmware: total of 17 FTE over 6 years, rather evenly spread until production...
- JMM mezzanine renewal (h/w+f/w) including TileCal fibre interface: total of 5 FTE over 6 years
- Integration, installation, commissioning (jFEX share): 6 FTE / 6 years

Known available effort:

Mainz is able to cover all required work on hardware, firmware and installation/commissioning

Total effort available: Physicist 5FTE, Engineer 1FTE per year

Conclusion

- The 8-module, single crate jFEX seems possible with today's technology
- Use of MicroPODs challenging (thermal and mechanical)
 - o/e engine is the same as in popular MiniPODs
- Phi ring scheme (\rightarrow IDR) allows for fine granularity and large environment @ 6.4Gb/s and 100% duplication of input data
- Larger environment achieved at baseline data rate by eta strip partitioning (2*6 modules, 1 crate)
- Which scheme is more suitable for phase-2 ?
- Even finer granularity and / or larger jets possible at higher transmission rates
- DPS needs to handle the required duplication
 - in eta (phi ring scheme)
 - in phi (eta strip scheme)

Details of fibre organization and content to be defined.

Started work on detailed specifications, in parallel exploring higher data rates...